


PATENTED

EASYMASS[®]

MAKES BALLASTING LIGHT WORK[®]

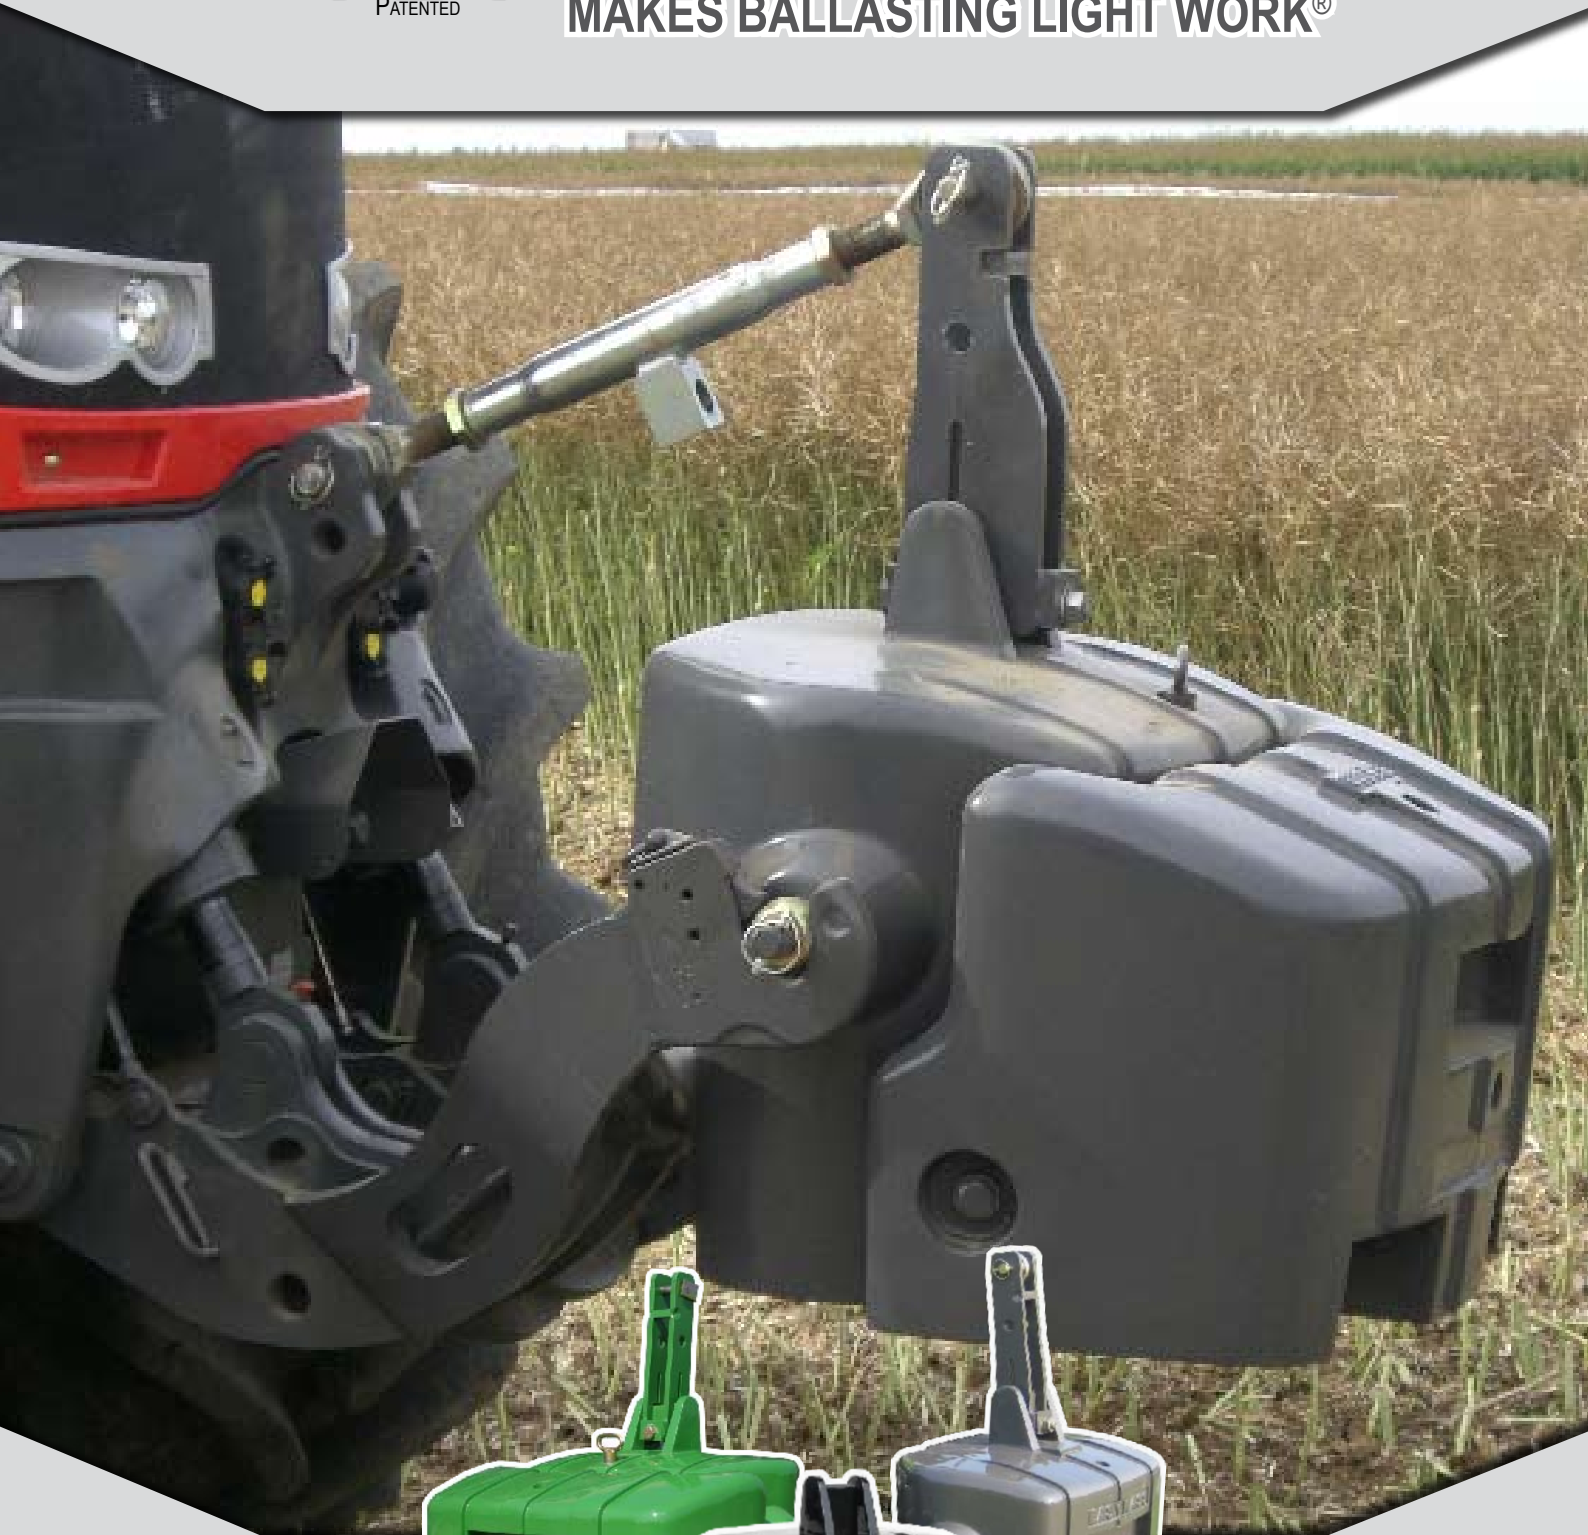

WWW.EASYMASS.NET

OUR WEIGHTS

BASIC WEIGHT 600 KG

- Delivered complete, ready for hook-up (hitch pins and top support provided)



Available colors



ADD-ON 600 KG WEIGHT

- Attaches conveniently to the basic weight with a sturdy pin
- Can be disconnected from the basic weight as needed
- Possible weight combinations 600 Kg (1320 LBS) or 1200 Kg (2640 LBS)

BASIC WEIGHT 900 KG

- Delivered complete, ready for hook-up (hitch pins and top support provided)



Available colors



ADD-ON 600 KG WEIGHT

- Attaches conveniently to the basic weight with a sturdy pin
- Can be disconnected from the basic weight as needed
- Possible weight combinations 900 Kg (2000 LBS) or 1500 Kg (3300 LBS)

BASIC WEIGHT 1800 KG ■ Delivered complete, ready for hook-up (hitch pins and top support provided)



Available colors



ADD-ON 600 KG WEIGHT

- Attaches conveniently to the basic weight with a sturdy pin
- Can be disconnected from the basic weight as needed
- Possible weight combinations 1800 Kg (3960 LBS) or 2400 Kg (5280 LBS)

SPECIAL WEIGHTS

DUAL-PURPOSE WEIGHT 900 KG



- Mounts on a 3-point hitch OR the John Deere base weight



Available for John Deere base weight only


SUITCASE WEIGHT 50 KG



- Available in left and right version



Available for John Deere Base weight only

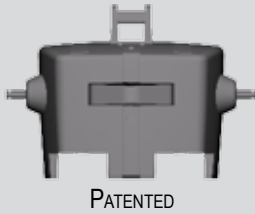

EASYMASS®

MAKES BALLASTING LIGHT WORK®

OUR ADVANTAGES

■ Adaptability

EASYMASS® offers a selection of basic weights at 600 Kg, 900 Kg or 1800 Kg. All can easily be combined with a 600 Kg Add-on weight to accommodate ballast requirements from 600 Kg to 2400 Kg.



■ Ruggedness and durability

EASYMASS® basic weights are delivered complete with reinforced top support and heavy-duty hitch pins.



■ Convenient handling

All our weights have a patented design with pockets for convenient handling with a pallet jack or forklift.



■ Outstanding finish

All weights are made from solid cast-iron. They are sealed and primed before painting to create a durable, smooth and bright finish.



Fleximass® LAFORGE



EASYMASS SARL

Pôle d'activités
02190 GUIGNICOURT
(France)

Tél : 33 (0)3 23 21 35 04
Fax : 33 (0)3 23 21 12 65
E-mail : easymass@wanadoo.fr

LAFORGE SYSTEMS, INC.

44215-C Treat Blvd..
CONCORD, CA 94521
(USA)

Tél : +1-925-827-2010
Fax : +1-925-689-7198
E-mail : lars@fronthitch.com

WWW.EASYMASS.NET